## Nenerberger


## Product Technical Information Sheet

Roof Tiling	
Material	Concrete
Minimum roof pitch	35 <sup>0</sup>
Headlap	65 mm
Batten spacing (fixed gauge)	100 mm
Size of tile	265 x 165 mm
Covering capacity	60 tiles per m <sup>2</sup>
Cover width	165 mm
Profile depth	13 mm
Hanging length	245 mm
Weight as laid	78.0 kg per m <sup>2</sup>
Weight per 1000 (including pallet & packaging)	1.322 tonnes
Weight per tile	1.3kg
Weight per pallet (including pallet & packaging)	1.015 tonnes
Bond	Cross / Broken
Quantity per pallet	768
Battens per m <sup>2</sup>	10 m
Batten size - up to 600 mm rafter centres	38 x 25 mm
Nail size/type for tiles	38 x 3.35 mm aluminium
	ring shank clout head

## Vertical Tiling

Material	Concrete
Minimum roof pitch	75 <sup>0</sup>
Headlap	38 mm
Batten spacing (fixed gauge)	114 mm
Size of tile	265 x 165 mm
Covering capacity	53 tiles per m <sup>2</sup>
Cover width	165 mm
Profile depth	13 mm
Hanging length	245 mm
Weight as laid	68.9 kg per m <sup>2</sup>
Weight per 1000 (including pallet & packaging)	1.322 tonnes
Weight per tile	1.3 kg
Weight per pallet (including pallet & packaging)	1.015 tonnes
Bond	Cross / Broken
Quantity per pallet	768
Battens per m <sup>2</sup>	8.8 m
Batten size - up to 600 mm rafter centres	38 x 25 mm
Nail size/type for tiles	38 x 3.35 mm aluminium ring shank clout head

## **Plain Tile**

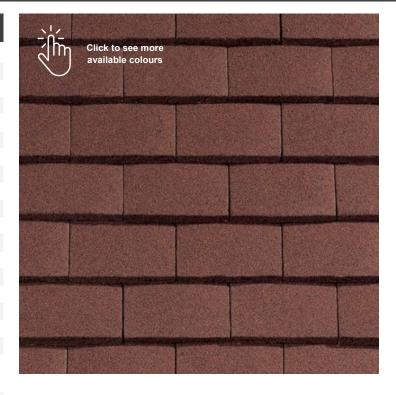



Unless otherwise stated, data is based on the tiles laid at minimum headlap. Before deciding on the batten gauge and linear coverage, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved.

**Tile Fixing** - Sandtoft roof tiles must be laid and fixed to comply with BS 5534: the British Standard Code of practice for slating and tiling, and BS 8000: Part 6: the British Standard Code of practice for workmanship on building sites. To ensure compliance with these Standards we strongly recommend that a calculated fixing specification be obtained from Sandtoft Technical Support or using Sandtoft's online tool at <u>www.all4roof.co.uk</u>

Product specification is subject to change and will be updated accordingly. Date of this data sheet publication; 29/09/2022

Expert help and advice 🛛 🔒 Compl

Comprehensive Design Services



1000+ products to choose from

11

01427 871200