




New County

Product Technical Information Sheet

Material	Clay
Minimum roof pitch	22.5°
Headlap (minimum)	62 mm
Headlap (maximum)	77 mm
Batten spacing at maximum gauge ¹	320 mm
Batten spacing at minimum gauge ¹	305 mm
Size of tile ¹	382 x 256 mm
Covering capacity	15.5 tiles per m ² 62mm headlap
Cover width	202 mm
Profile depth	65 mm
Hanging length	355 mm
Weight as laid	38.0 kg per m ² 62mm headlap
Weight per 1000 (including pallet & packaging)	2.505 tonnes
Weight per tile	2.45 kg
Weight per pallet (including pallet & packaging)	0.963 Tonnes
Bond	Straight
Quantity per pallet*	378
Quantity per row/band	42
Quantity per mini pack	6
Quantity per layer	126
Mini packs per row	7
Battens per m ²	3.2m at 62mm headlap
Batten size - up to 450 mm rafter centres	38 x 25mm
Batten size - up to 600 mm rafter centres	50 x 25mm
Nail size/type for tiles	38 x 3.35 mm aluminium ring shank clout head
Nail size/type for metal tile clips	Nail integrated with clip

*pallet quantity for Antique Slate is 252

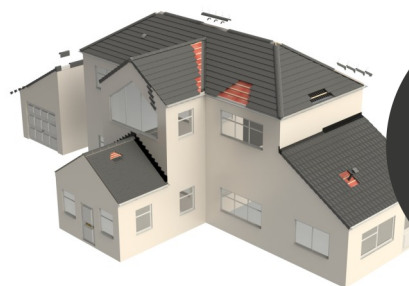

**BIM Objects
Download**



¹Clay tiles are subject to small variations in size because of drying and firing shrinkage in the manufacturing process. Before deciding on the batten gauge and linear coverage, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved. Unless otherwise stated, data is based on the tiles laid at minimum headlap.

Tile Fixing - Sandtoft roof tiles must be laid and fixed to comply with BS 5534: the British Standard Code of practice for slating and tiling, and BS 8000: Part 6: the British Standard Code of practice for workmanship on building sites. To ensure compliance with these Standards we strongly recommend that a calculated fixing specification be obtained from Sandtoft Technical Support or using Sandtoft's online tool at www.all4roof.co.uk

Product specification is subject to change and will be updated accordingly. Date of this data sheet publication; 29/09/2022