

# Colormat Scripto

Deeply sanded to give a dynamic textured through coloured panel.

## Product Technical Information Sheet


Product Type	Fibre Cement Façade Panels
Intended Use	Internal and External Walls and Soffits
Fixing Options	Rivets or screws
Standard Panel Sizes (Length x Width)	3050 x 1220mm (Squared) 2500 x 1220mm (Squared)
Thickness	8mm
Nominal Weight	14.4 kg/m <sup>2</sup>

## Technical Properties to BS EN 12467

Weather Resistance	Category A
Bending Strength	Class 5 ( $\geq 24$ MPa)
Dimensional Variation	Level I
Density (Oven Dry)	$\geq 1600$ kg/m <sup>3</sup>
Modulus of Elasticity (Wet)	12,000 MPa
Water Impermeability	No Water Drops
Durability (Freeze-Thaw)	$R_L \geq 0.75$
Durability (Warm Water)	$R_L \geq 0.75$
Durability (Soak-Dry)	$R_L \geq 0.75$
Durability (Heat-Rain)	Pass
Reaction to Fire (BS EN 13501-1)	A2-s1, d0

### Issue Date: 30/04/2021

Technical data correct at time of issue. SVK panels conform to EN 12467 and are CE marked. The use of the panels for cladding is covered by European Technical Assessment 14/0284. Any questions regarding this data should be referred to the Wienerberger Technical Department. Due to the limitations of screen and print colour representation of product images it is advised that samples are viewed prior to ordering.

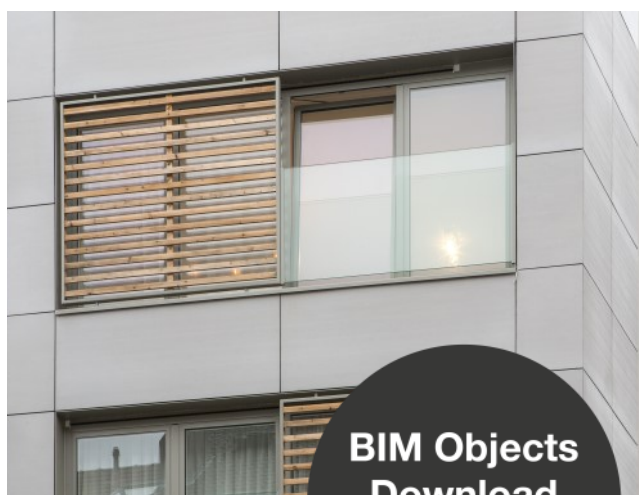


**BIM Objects  
Download**






# Colomat Scripto


Deeply sanded to give a dynamic textured through coloured panel.




Pearl



Jasmine



Storm



Slate



Natural



Champagne



Camel



Earth




Sunset




Raspberry



Chestnut



Caribbean



Daybreak