



Installation guide for Sandtoft BritSlate hooks

Sandtoft BritSlate hooks are available to suit 75mm, 100mm and 120mm headlaps. Where hooks are required for other headlaps the headlap should be increased to the nearest available hook size.

BritSlate hooks are not suitable for securing eaves course slates or slates directly above slate-and-a-half or double slates.

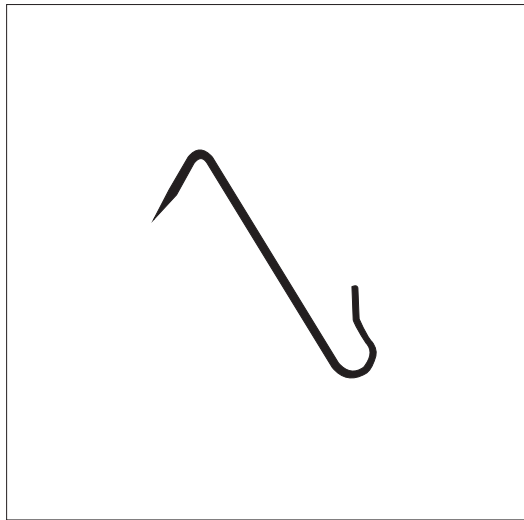

Drive the slate hooks centrally into the slate batten between each slate.

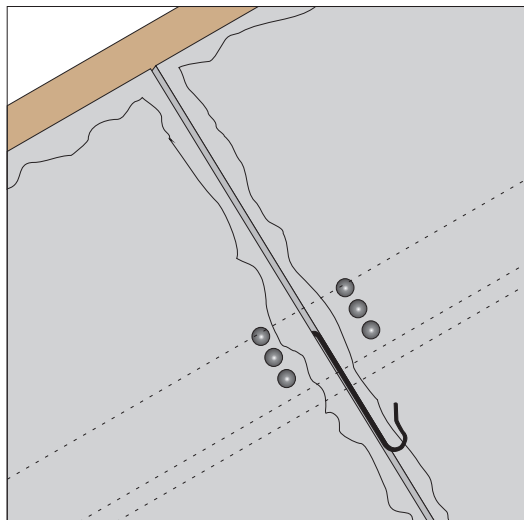

Position the tail of each slate into a hook and, if specified, nail into the slate batten above.

At verges and valleys, verge clips should be used to secure the tails of slates.

